


TF9

Discontinuous joists on intermediate bearing

Blocking from STEICO joist or STEICO LVL according to transferred loads

Web stiffeners may be required

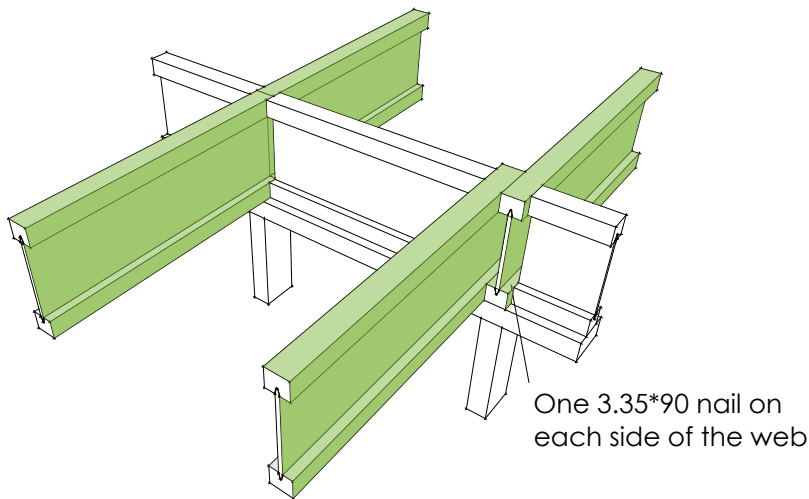

Joists may be butt jointed where there is a minimum of 45mm bearing available. If this is not possible joists are to be staggered and provided with full bearing