


# STEICO *weatherdek*

P5 peel-off protected flooring

Flooring Systems  
naturally made from timber

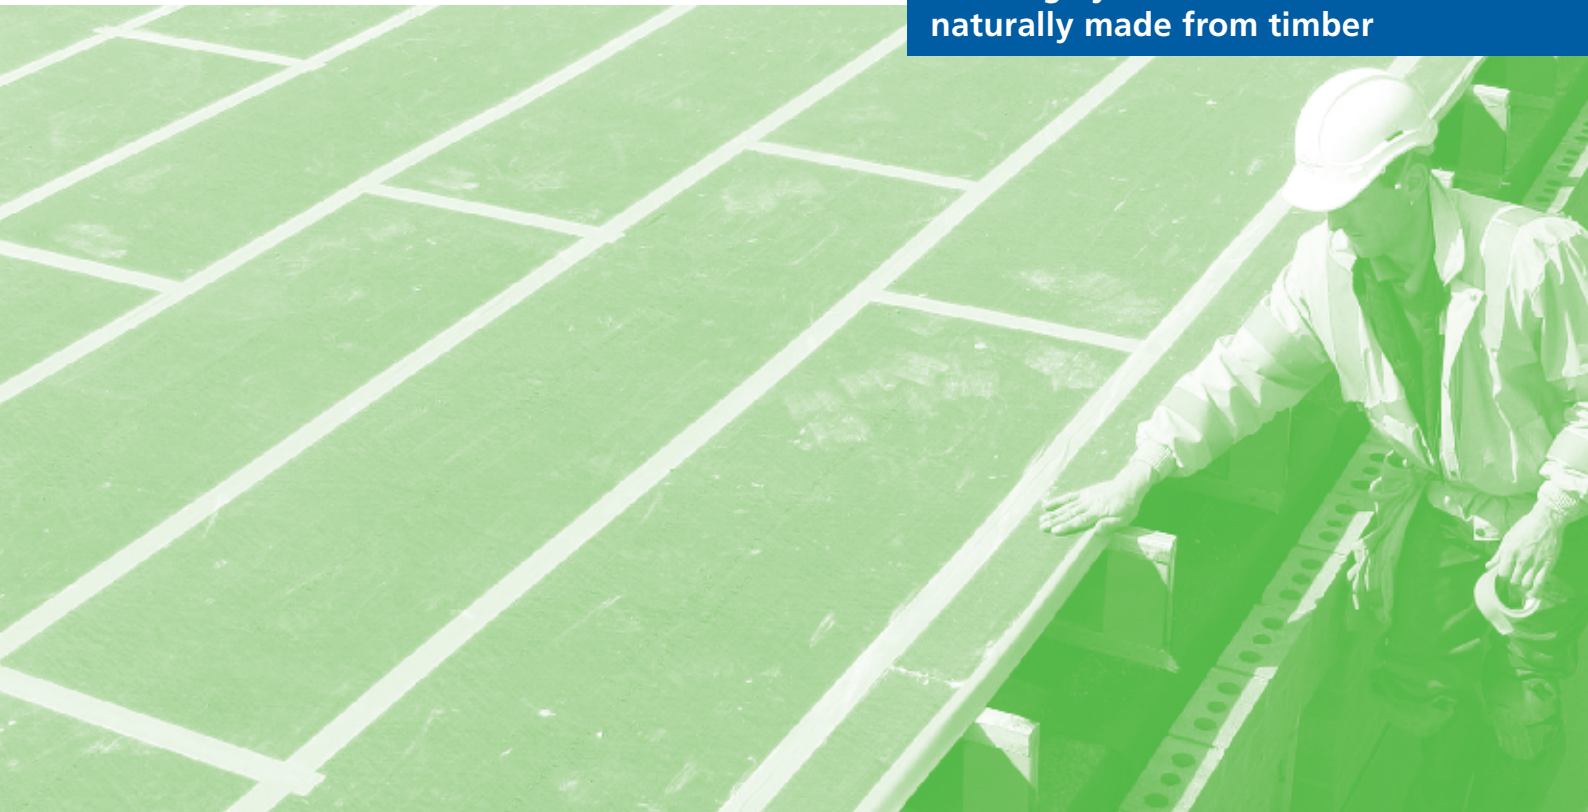

STEICO *weatherdek* is the original and "best in class" flooring solution designed for joisted and floating floor applications.

It combines **high quality particle board** with an easily removed, hard wearing, slip resistant and **waterproof peel off film**. A secondary surface sealer is under the film for added protection.



- New high performance Acrylic surface
- Full 42 day exposed to weather protection
- Ideal for use with STEICO I joists for a noise free superior floor package
- Specially developed "trademark" green film
- Fully customised fixing kit
- BBA approval
- FSC Certified
- Prompt delivery service
- Tongue and grooved four edges
- Produced in the UK to STEICO's exclusive specification
- May be installed using the Fast-Fix system

For more information please visit our website at [www.steico.co.uk](http://www.steico.co.uk)



## | STEICOweatherdek BOARD SPECIFICATIONS

Thickness [mm]	Board Coverage [mm]	Weight [kg / m <sup>2</sup> ]	Pieces per pallet	Pallet Coverage [m <sup>2</sup> ]	Pallet weight [kg]
18	2400 x 600	12.3	86	123.8	ca. 1600
22	2400 x 600	15.0	70	100.8	ca. 1600

## | STEICOweatherdek PRODUCT DESCRIPTION

STEICOweatherdek is a BBA approved P5 T&G 4 sides 2400x600 mm chipboard flooring product available in 18mm and 22mm thicknesses.

The surface of the chipboard is coated with a tough, durable, hard wearing and water-proof, peel-off film. This UV resistant and anti slip surface protects the chipboard from mechanical damage, dirt and moisture.

The trademark green film allows the floor to be laid before it is protected by a roof, or any further floors. The level of weather protection provided by the film, when laid in accordance with the

instructions, is such that the surface can remain exposed for up to 42 days without detriment to the underlying chipboard. Saves time and money on buying, fitting, removing and disposing of expensive secondary surface protective sheets.

In addition, the sealant adhesive between the chipboard and the film is a specially developed formula that provides an extra level of protection against light damage and moisture, even when the surface film is itself damaged. This film can be simply peeled off; leaving a pristine surface that can be buffed up to give a truly professional finish.

## | STEICOweatherdek TECHNICAL VALUES

Baseboard conforms to	EN 312
Edge profile	tongue & groove four edges
Board density [kg/m <sup>3</sup> ]	ca. 685
Formaldehyde class E1	≤ 8 mb/100g
Raw material	wood fibre, resin, hardener, wax, polyethylene film, bonding agent

STEICOweatherdek revolutionised the way leading house builders use chipboard flooring as a platform to provide full temporary weather protection allowing other trades to work safely above and beneath. STEICOweatherdek boards should be used with the custom fixing kit to ensure BBA requirements are met

### Components

- A unique bonding agent
- Application gun
- D3 adhesive for the T&G joints
- Weatherdek tape with applicator for sealing board joints and edges



Your STEICO Agent

www.steico.co.uk