


M6

Internal wall built around joists

Minimum 38*38 perimeter noggin skew nailed or fixed to joist using proprietary clip. Noggin to be fixed 25-75mm from face of wall.

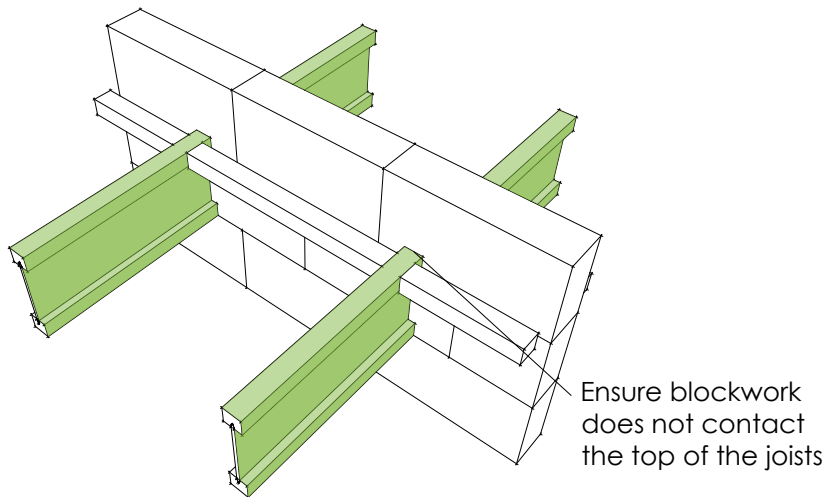

89mm minimum bearing for continuous joists.
Ensure discontinuous joists have a minimum 45mm bearing. Joists may be lapped for a full bearing