


R4a

Mono pitched ridge beam with sloped hangers

STEICOjoist or
STEICO LVL blocking

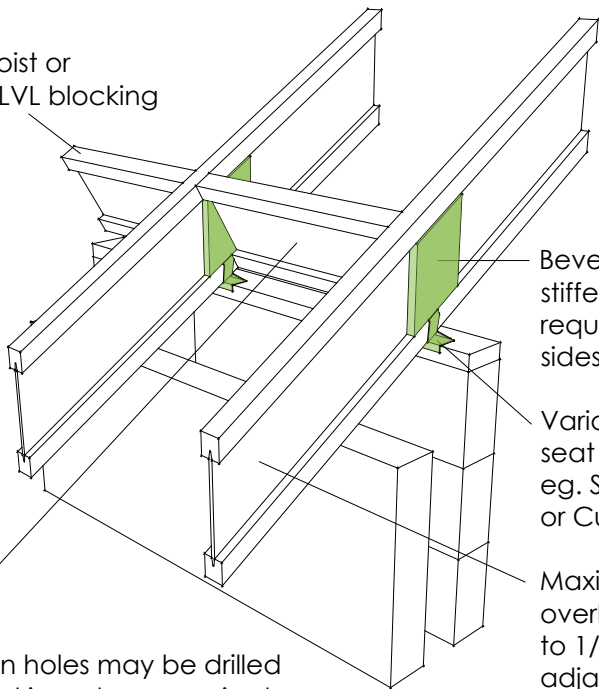

Bevelled web stiffener may be required both sides

Variable pitch seat connector
eg. Simpson VPA
or Cullen ACE

Maximum overhang limited to 1/3 of the adjacent span or less than 600mm

Ventilation holes may be drilled in the blocking where required