


R5a

Bevelled wallplate at eaves

STEICOjoist or
STEICO LVL blocking

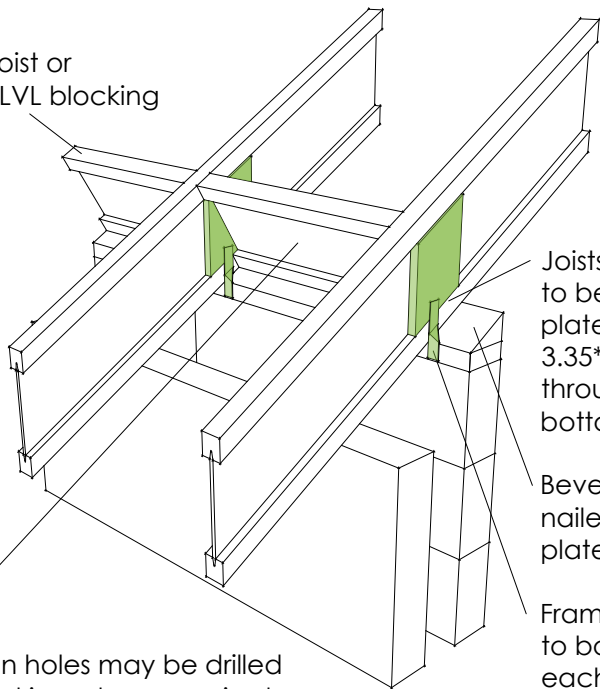

Joists connected
to bevelled wall
plate using 2 no.
3.35*90mm nails
through each
bottom flange

Bevelled plate
nailed to wall
plate

Framing anchors
to both sides of
each joist

Ventilation holes may be drilled
in the blocking where required