


Allowable holes in STEICO LVL X Rimboard

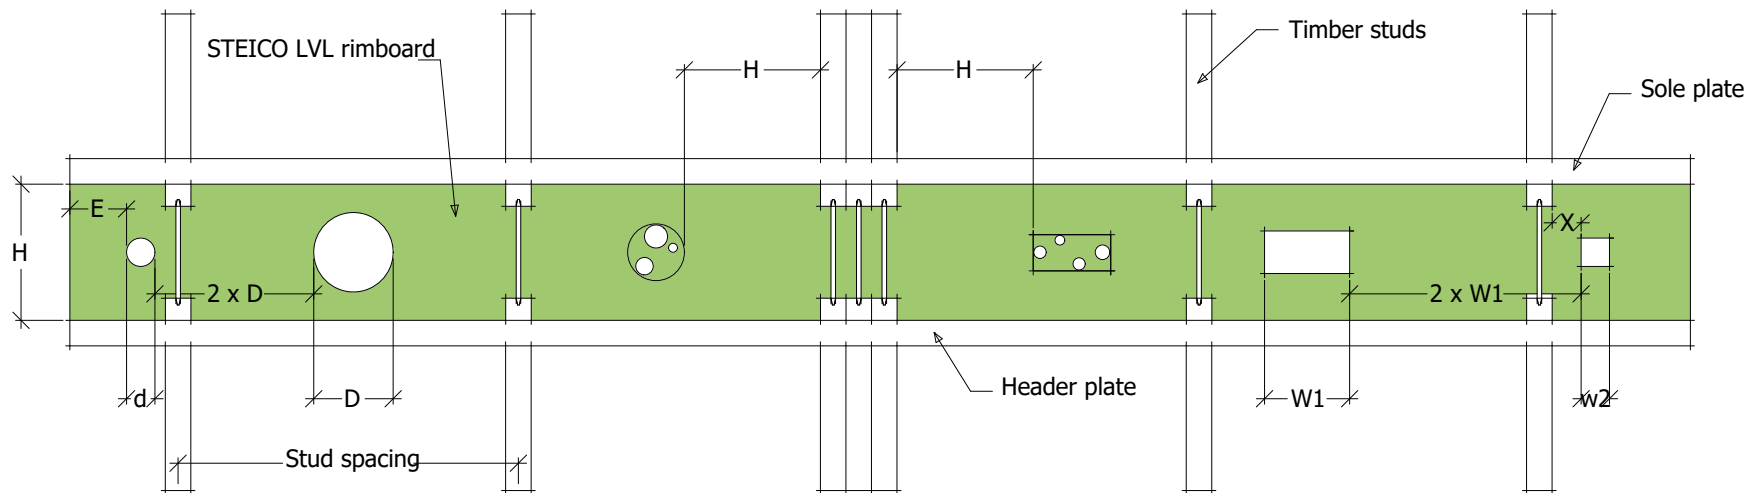

H = Depth or Rimboard

E = $2 \times D$ for circular holes or $3 \times W$ for rectangular holes

X = 50mm

Max diameter of round holes = H less 100mm. Max length of rectangular holes = Stud spacing / 2

No holes can be located within the distance H of concentrated loads from above