


Joists bearing on party walls

Blocking may overhang the inside face of the wall by half the blocking width

Overall minimum thickness of solid rimboard and blocking to be 76mm

Timber or Plywood web stiffeners to be fitted to the end of the i-joists

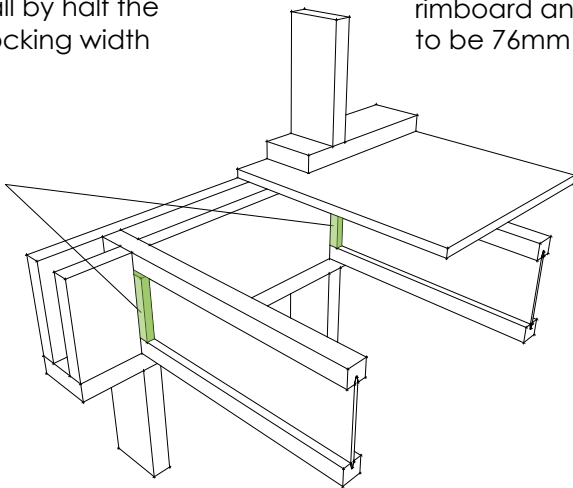

Minimum nailing for class 1 structures to be 3.00*75 nails at 300mm centers which should be applied at each interface where lateral loads are to be transferred. Refer to STA "Design Guidance on Disproportionate Collapse" for further information