

# STEICO *secure* Verlängerung W 63



- Push-on profile for plastic base rail S61 to extend the projection by 40 mm
- Installation by simply plugging on

## Application area



- Push-on profile for base rail S61 to extend the projection by 40 mm in each case

## Technical data

Colour	White
Material	Plastic

## Forms of delivery

### Delivery in handy boxes

Colour shade	Length [mm]	Projection [mm]	Number/pack. [pcs.]	Metres/pack. [m]
White	2000	40	10	20

## Notes

### Storage

- Dry, protect from UV radiation and moisture

### Disposal

- dispose with normal construction waste, observe applicable legal guidelines

### Cutting

- With overlay shears or other tools suitable for cutting plastic



### Occupational health and safety

- Observe the safety data sheet
- Wear safety goggles and work gloves when cutting to size

# STEICO*secure* Verlängerung W 63

## Installation

- This document is based on the German technical data sheet and is intended for general information purposes in an international context. National regulations and building codes must be additionally observed.
- Panel joints must be offset
- To ensure that the insulation boards can be laid evenly, no dirt / adhesive mortar should be allowed to get onto the support surface
- Check that the base rail is properly anchored; if necessary, insert a new dowel at an appropriate distance
- Insert STEICO*secure* extension W63 onto STEICO*secure* base rail S61 to extend the projection by 40 mm for each installed piece
- Can be combined with STEICO*secure* skirting profile W 62-2 and STEICO*secure* skirting rail S 61
- To achieve a projection of 240 mm, two STEICO*secure* extensions W63 can be attached to the STEICO*secure* base rail S61.
- It is not permitted to extend the base rail with more than two extensions.

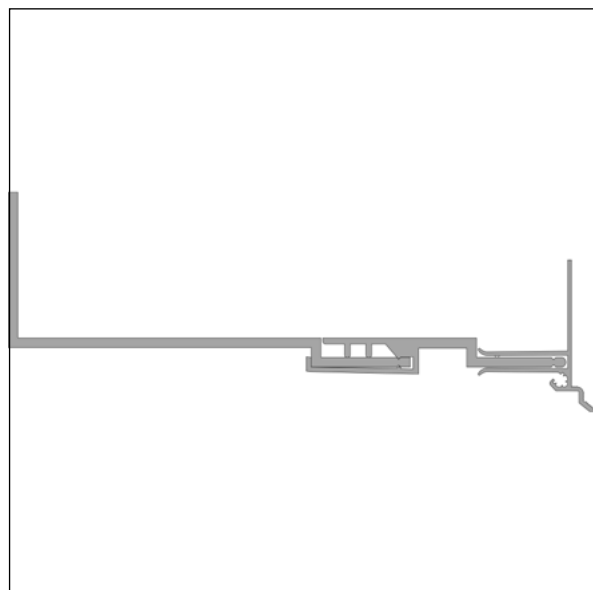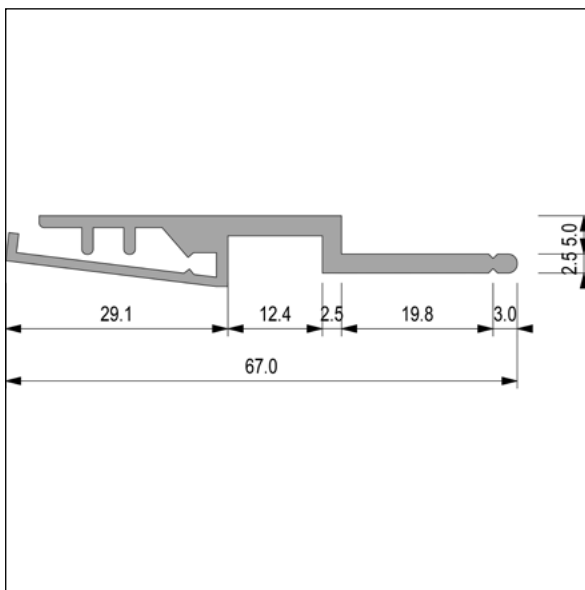

## Certificates and quality management



## ☰ Caption

### other abbreviations

- pal.** Pallet
- T&G** Tongue and Groove
- pac.** Packaging
- approx.** Approximately
- pcs.** pieces