
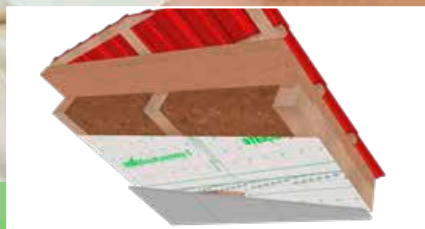


# Product overview

## STEICOMulti sealing system

Sealing system for  
STEICO insulation solutions

Extended roll core  
for quicker  
unrolling!



### The STEICOMulti sealing system for a non – permeable building shell





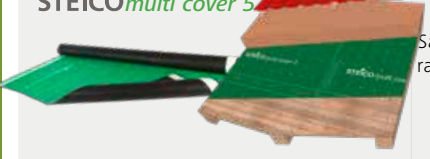
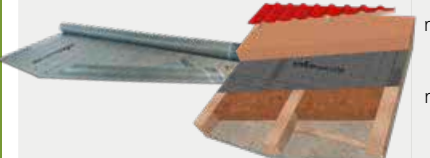

#### Areas of application

For internal and external  
application on roofs, walls  
and floors for  
newbuild or renovation


- Airtight and vapour control membranes for internal and external application
- Extensive taping and sealing accessories for the STEICO membrane system
- Safe and secure

## Airtight membranes and vapour control layers

Whether in new buildings or renovations, whether used from the inside or the outside – with the STEICO product range, you will find the right airtight membranes and vapour control layers for all application areas.

	Product	Areas of application	Properties	$s_d$ value [m]	Weight [g/m <sup>2</sup> ]	Roll weight [kg]	Roll area [m <sup>2</sup> ]	Width [m]	Length [m]
Indoors	<b>STEICO<i>multi</i> membra 5</b> 	Vapour control layer for roof, wall and ceiling constructions	<ul style="list-style-type: none"> <li>Particularly robust and flexible</li> <li>Highly tear-resistant</li> <li>Suitable for air-injected insulation</li> <li>Diffusible</li> </ul>	5	130	10 (1,50 m) 20 (3,00 m)	75 150	1,50 3,00	50
	<b>STEICO<i>multi</i> renova</b> 	Moisture-variable vapour control layer for roof, wall and ceiling constructions	<ul style="list-style-type: none"> <li>Particularly robust and flexible</li> <li>Highly tear-resistant</li> <li>Suitable for air-injected insulation</li> <li>Moisture-variable</li> </ul>	0,4 - 35	100	9 (1,50 m) 18 (3,00 m)			
Outdoors	<b>STEICO<i>multi</i> cover 5</b> 	Safe-to-walk-on, rainproof vapour control layer	<ul style="list-style-type: none"> <li>Extremely safe to walk on even in wet conditions</li> <li>2 integrated self-adhesive areas</li> <li>Airtight and resistant to driving rain</li> <li>Highly tear-resistant</li> </ul>	5	150	11	75	1,50	50
	<b>STEICO<i>multi</i> UDB</b> 	Highly vapour-permeable airtight membrane, sarking membrane and roof lining membrane	<ul style="list-style-type: none"> <li>3-layer, tear-resistant and flexible</li> <li>2 integrated self-adhesive areas</li> <li>Airtight, highly permeable and resistant to driving rain</li> <li>Highly tear-resistant</li> </ul>	0,02	165	13			
	<b>STEICO<i>multi</i> CAP</b> 	Diffusion permeable, fully self-adhesive and airtight weather protection membrane	<ul style="list-style-type: none"> <li>3-layer, tear-resistant and flexible</li> <li>High security thanks to fully self-adhesive membrane</li> <li>Airtight, vapour permeable and resistant to driving rain</li> <li>Outdoor exposure of up to 3 months possible</li> </ul>	0,2	255	approx. 12			




## Nail sealing tape


	Product	Areas of application	Properties	Width [mm]	Length [m]
Accessories	<b>STEICO<i>multi</i> nail</b> 	Additional sealing solution for counter battens when using STEICO <i>multi</i> UDB / STEICO <i>safe</i>	<ul style="list-style-type: none"> <li>Adhesive on one side</li> <li>Resistant to ageing</li> <li>High elasticity</li> <li>Long-lasting rainproof characteristics</li> </ul>	50	30

## Adhesive and sealant accessories

Thanks to our extensive adhesive and sealant accessories, the STEICO membrane and sheet range can be connected with each other and to adjacent components in a secure and reliable manner.

Product	Areas of application	Properties	Width [mm]	Length [m]
 <p><b>STEICO<i>multi</i> tape P</b></p>	High performance adhesive tape with kraft paper backing for connections of STEICO membranes or timber panels	<ul style="list-style-type: none"> <li>Highly resistant to ageing, solvent-free pressure-sensitive adhesive</li> <li>Can be torn by hand</li> <li>Robust kraft paper backing</li> <li>Stickers ideal for sealing injection holes</li> </ul>	60 ----- 180 × 180	40 ----- 222 stickers /roll
 <p><b>STEICO<i>multi</i> tape F</b></p>	High performance adhesive tape with special film for connection of STEICO membranes and STEICO wood fibre boards in combination with STEICO <i>multi</i> primer and STEICO <i>fix</i>	<ul style="list-style-type: none"> <li>Highly resistant to ageing, solvent-free pressure-sensitive</li> <li>Extremely high UV and weathering resistance</li> <li>Can be processed from -10°C</li> <li>Flexible special film backing</li> <li>Extremely high UV and weather resistance</li> </ul>	60 ----- 60 (20/40) 100 150	25
 <p><b>STEICO<i>multi</i> tape black</b></p>	For taping connections and junctions of STEICO <i>universal black</i> , can be rendered over	<ul style="list-style-type: none"> <li>Highly resistant to ageing, solvent free</li> <li>Extremely high UV and weather resistance</li> <li>Can be processed from -10°C</li> <li>Can be rendered over</li> <li>Extremely high UV and weather resistance</li> </ul>	70 140	25

Product	Areas of application	Properties	Content
 <p><b>STEICO<i>multi</i> primer</b></p>	Primer for the adhesion promotion/ improvement of adhesive bondings with STEICO <i>multi</i> tape on mineral substrates with different absorbency levels as well as wood and wood-based materials	<ul style="list-style-type: none"> <li>Solvent-free</li> <li>Rapid flash-off time</li> <li>High penetration</li> <li>Can be processed from -10°C</li> <li>Practical dispensing bottle</li> </ul>	1.000 ml
 <p><b>STEICO<i>multi</i> connect</b></p>	Permanently elastic adhesive sealant for connection of STEICO membranes and connection to adjoining surfaces	<ul style="list-style-type: none"> <li>Solvent-free</li> <li>Does not drip off</li> <li>Extremely high adhesive strength</li> <li>Can also be used from the outside for roof rehabilitations</li> <li>Frost resistant</li> </ul>	310 ml (cartridges) 600 ml (cardboard box)
 <p><b>STEICO<i>multi</i> fill</b></p>	Permanently elastic gap sealant for ETICS systems for gaps up to 6 mm, also suitable for repair adhesive	<ul style="list-style-type: none"> <li>Solvent-free</li> <li>Extremely high adhesive strength</li> <li>Can be used wet on wet</li> <li>Can be plastered over / UV stable</li> </ul>	310 ml (cartridges)

Product	Content
 <p><b>STEICO<i>multi</i></b> Building shell sealing systems</p>	2 rolls STEICO <i>multi</i> tape P (60 mm × 40 m) 1 roll STEICO <i>multi</i> tape F (60 mm × 25 m) 3 cartridges STEICO <i>multi</i> connect (310 ml)
	2 rolls STEICO <i>multi</i> tape F (100 mm × 25 m) 1 bottle STEICO <i>multi</i> primer (1000 ml)

Indoors

Indoors & Outdoors

Indoors & Outdoors

Indoors

Outdoors



### Additional sealing products complete the STEICO system and offer maximum reliability.

Product	Areas of application	Properties	Thickness [mm]	Ø [mm]	
<b>STEICO plugs</b> 	Sealing plug for the secure sealing of STEICOzell / STEICOfloc air injection openings	<ul style="list-style-type: none"> <li>Greater sealing thanks to precisely fitting form</li> <li>Can be quickly and easily processed</li> <li>Can be plastered over</li> </ul>	35	50 68 105 120	
Product	Areas of application	Properties	Thickness [mm]	Length [mm]	
<b>STEICOfix</b> 	Wood fibre insulation wedge with bonded membrane for a secondary water removal layer under window sills.	<ul style="list-style-type: none"> <li>Reliable protection from wind driven rain and snow</li> <li>Ideal for use in combination with STEICOprotect ETICS</li> <li>Particularly easy to install</li> </ul>	100 140 180 200 260	1.350	
Product	Areas of application	Properties	Thickness [mm]	Width [mm]	Length [mm]
<b>STEICO Hartfaserstreifen</b> 	Additional protection when using air-injected insulation and membranes Additional protection on rafter sides when using up and over vapour control layer installation	<ul style="list-style-type: none"> <li>Installation possible with impact stapler</li> <li>Strip can be shortened by hand</li> </ul>	2,8	50	1.200

### Application matrix for STEICOmulti adhesive range

	Substrate	STEICOmulti tape P	STEICOmulti tape F	STEICOmulti tape black	STEICOmulti connect	STEICOmulti fill	STEICOmulti nail
Adhesive bonding of STEICO sheets and membranes on adjacent components	Masonry, rendering, concrete		× a)	× a)	×		
	Wood components	×	×	×	×		
	Hard wood-based panels	×	×	×	×		
	Hard plastic	×	×	×	×		
	Metal	×	×	×	×		
Adhesive bonding of STEICO wood fibre products	Joint sealing of STEICO sarking boards, tongue & groove		× a)	× a)		×	
	Adhesive bonding of STEICO sarking boards, butt joint		× a)	× a)			
	Adhesive bonding of STEICO plaster base system, butt joint and joints			× a)		×	
	STEICOfix window joint		×	×		×	
Nail tight	STEICOmulti UDB / STEICOsafe						×

The substrate to be bonded must be dry, capable of bearing a load and be free from dust and grease. The adhesive bondings may not be located in stagnant water. Stagnant water in the area of the adhesive bonding must be prevented.

a) Substrate should be sealed with STEICOmulti primer; taping width on primed surfaces ≥ 50 mm.



Your STEICO Partner

www.steico.com

