


STEICO*secure* Putztrennprofil



- Plastic profile (6 mm) for separating plaster layers for the STEICO*secure* ETICS
- Clean plaster finish
- Movement absorption possible thanks to the flexible TPE movement tab

Application area

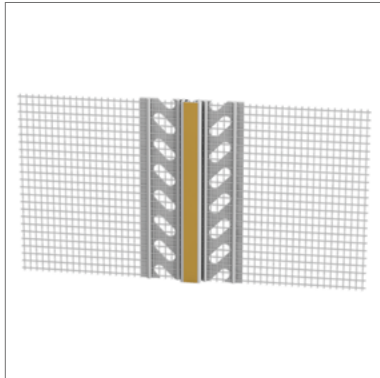

- Profile for separating plaster systems or different types of plaster for level, vertical installation

Technical data

Colour	White
Material	Plastic
Fabric material	Glass fibre mesh

Forms of delivery

Delivery in handy boxes

Colour shade	Length [mm]	Number/pack. [pcs.]	Metres/pack. [m]
White	2000	25	50

Notes

Storage

- Dry, protect from UV radiation and moisture

Disposal

- dispose with normal construction waste, observe applicable legal guidelines

Cutting

- With overlay shears or other tools suitable for cutting plastic

Occupational health and safety

- Observe the safety data sheet
- Wear safety goggles and work gloves when cutting to size

STEICO*secure* Putztrennprofil

Installation


- This document is based on the German technical data sheet and is intended for general information purposes in an international context. National regulations and building codes must be additionally observed.

Substrate

- Stable, even, dry substrate - free of substances that could impair adhesion (e.g. grease, dirt)

Setting the profile

- Apply the reinforcing mortar over the entire surface in the width of the mesh strips
- Insert the profile into the fresh reinforcement compound / toothing flush and fill in
- Remove excess reinforcement compound with a stainless steel trowel
- The surface mesh must be installed overlapping up to the two inner edges of the profile
- After drying, apply the other layers of plaster
- Pull off textured plaster over the edge, work smooth plaster onto the edge
- Do not remove the protective film until the final coat is dry
- Horizontal application only for separating different types of plaster; pay attention to surface level installation; no protruding edge
- The separating joint can be painted over to visually match the façade
- Not suitable for forming structural building joints

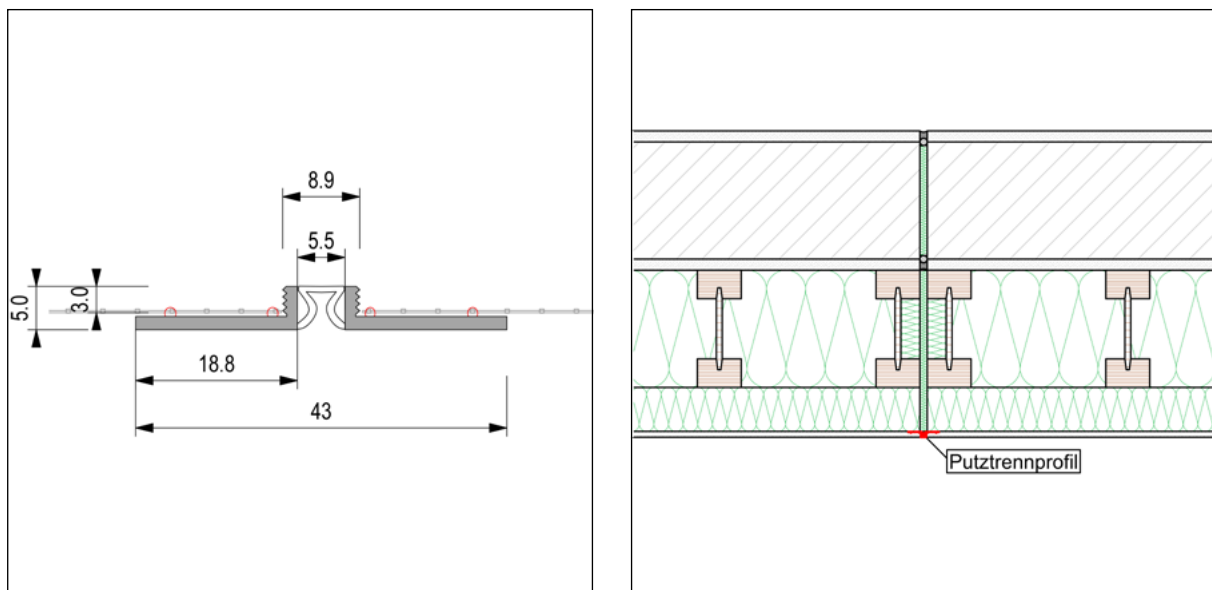

Certificates and quality management



STEICO *secure* Putztrennprofil

☰ Caption

other abbreviations

pal. Pallet

T&G Tongue and Groove

pac. Packaging

approx. Approximately

pcs. pieces